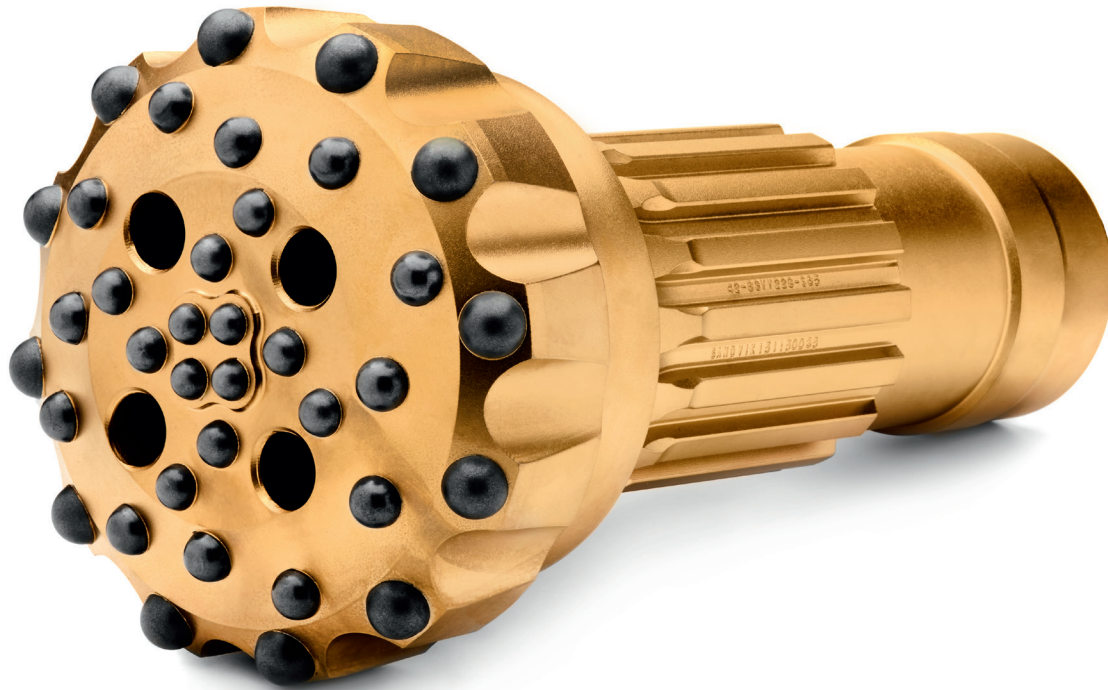


FASTER DRILLING AT A LOWER COST

SANDVIK RH560 DTH BITS



NEW BITS DESIGNED FOR A MORE PRODUCTIVE DRILL

The new bits for the RH560 DTH hammer have been developed to meet the performance needs for this high output hammer – a robust and reliable addition to your surface mining and long-haul production drilling operations. With the industry standard shank and the foot valve taken out you will experience a hassle-free operation for your peace of mind.

LESS DOWNTIME







The bits offer new design improvements that help them stand up to the increased power from the RH560 hammer, making them more resistant to breakage. The addition of a foot valve means the bits can also be backward compatible with the RH460 hammer.

THE RIGHT BIT FOR EVERY APPLICATION

The bits come with different face configurations – like flat-face, a good all-around bit for fractured ground formations; concave, another all-purpose bit that improves hole straightness; and convex, a shape that offers high penetration rates for soft- to medium-hard ground.

The new uniface DTH bits, in particular, offer features that improve bit life and better collaring. This is achieved through better airflow distribution and even spacing between gauge buttons.

SANDVIK RH560 DTH BITS

SANDVIK RH560	Diameter		Air holes	Gauge buttons	Button dia. mm		Weight		Part No.	Shank
	mm	inch			gauge	front	kg	lb		
560-6 bits										
Concave face / Spherical button										560-6 Shank
	165	6 1/2	3	9	18	18	24.1	53.0	42-63DE165-S48	
	165	6 1/2	3	9	18	18	24.1	53.0	42-63DE165-S65	
	172	6 3/4	3	9	18	18	24.8	54.6	42-63DE172-S48	
	172	6 3/4	3	9	18	18	24.8	54.6	42-63DE172-S65	
Convex face / Ballistic button										
	165	6 1/2	3	9	18	18	24.2	53.2	42-63GE165-R55	
	172	6 3/4	3	9	18	18	24.6	54.1	42-63GE172-R55	
Convex face / Spherical button										
	172	6 3/4	3	9	18	18	25.8	56.8	42-63GE172-W55	
	190	7 1/2	3	9	18	18	28.8	63.4	42-63GE190-W55	
Flat face / Spherical button										
	165	6 1/2	3	9	18	18	25.2	55.4	42-632E165-S48	
	172	6 3/4	3	9	18	18	26.0	57.2	42-632E172-S48	
	203	8	3	9	18	18	31.4	69.1	42-632E203-S48	
Uniface / Spherical button										
	165	6 1/2	4	8	18	18/16/14/13	24.0	52.8	42-63YY165-S48	
	165	6 1/2	4	8	18	18/16/14/13	24.0	52.8	42-63YY165-S65	
	172	6 3/4	4	8	18	18/16/14/13	24.8	54.6	42-63YY172-S48	
	172	6 3/4	4	8	18	18/16/14/13	24.8	54.6	42-63YY172-S65	

Sandvik Mining and Rock Technology reserves the right to make changes to the information on this data sheet without prior notification to users. Please contact a Sandvik representative for clarification on specifications and options.

F1-1026ENG © Sandvik Mining and Rock Technology 2017 SANDVIK is a registered trademark owned by Sandvik Intellectual Property AB in Sweden and other countries.